
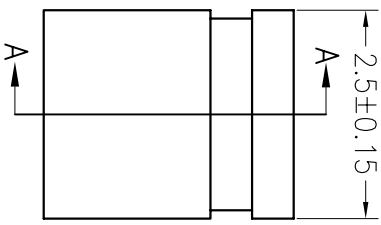


HSE ROHS



SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Phosphor Bronze
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

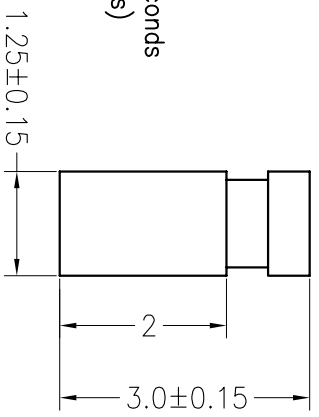


SECTION A-A



Ordering Information

3812 30 01 C XX B 01

- Plastics Height 30=3.0mm
- No.of Pins 01=1PORt
- Contact Plating
 G0:0.8U" Gold
 G1:1U" Gold
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 NO:Gold Flash/Ni
 NI:Ni
- Color Type
 B=Black
 U=Blue
 R=Red
 W=White
 Y=Yellow



1.27±0.1

OPERATION		DRAW		SCALE		FIT	
X.X	±0.30	JinChengXin	18.07.10	UNIT	mm	SIZE	A4
X.XX	±0.20	CHECK		SHEET	1/1	PART NO.	38123001CXXB01
X.XXX	±0.10			PROJ.	1/1	TITLE:	1.27 Mini Jumper 1Port Colise
Angle	±3°	APPROVE					
DIM	TOL						
REV	DATE	MODIFICATION DESCRIPTION	CHANGE				
A0	2018.07.10	NEW DRAWING					
1							

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992