




SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

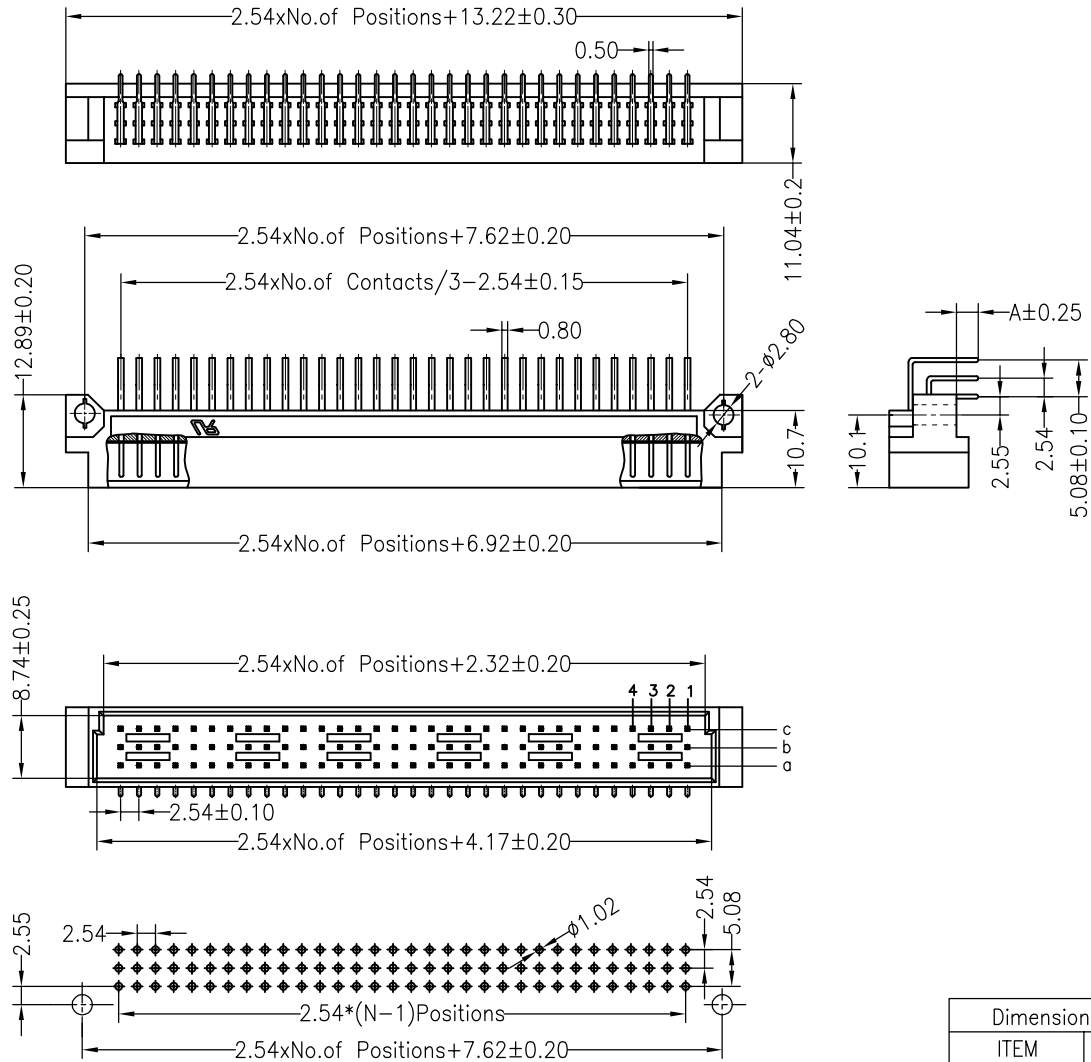

Dimension antitheses list	
ITEM	A
Standard	3.00
Alternate	

Ordering Information

35113 XX A M R XX B N A 01

No. of Pins
30~96PIN

Contact Type
M= male

Contact Plating
 G0:Gold Flash
 S2:2U" Gold
 S3:10U" Gold
 S4:15U" Gold
 S5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin

Packing
 0=PE Bag
 A=Tray

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

OPERATION		DRAW	YiYuSheng	14.09.16	SCALE	FIT
X.X	± 0.30					
X.XX	± 0.20	CHECK			UNIT	mm
X.XXX	± 0.10					
Angle	$\pm 3'$	APPROVE			SIZE	A4
DIM	TOL					
					SHEET	1/1
					PROJ.	

JiLN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
B	2014.09.16	增加UL标识	
A0	2012.04.10	NEW DRAWING	

PART NO.	35113XXAMRXXBNA01
TITLE:	欧式插座 公座 90度 3xNPIN 成品系列图