



FILE NO. E392810


SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°c to +105°c
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)




Ordering Information

3210-XX W XX X B K00 01

No. of Pins Per Row 6--64
 Contact Plating G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP
 SN:Tin

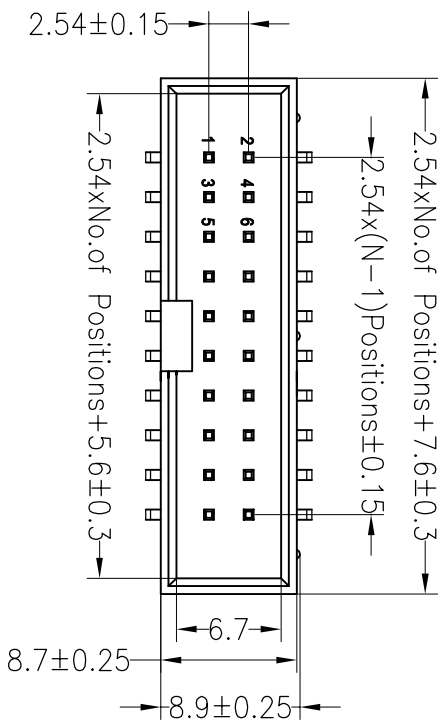

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

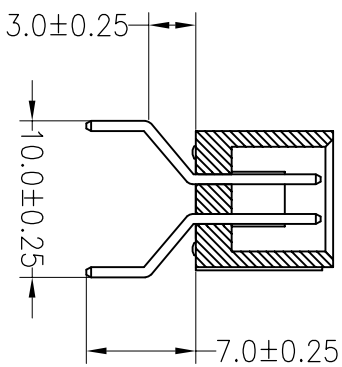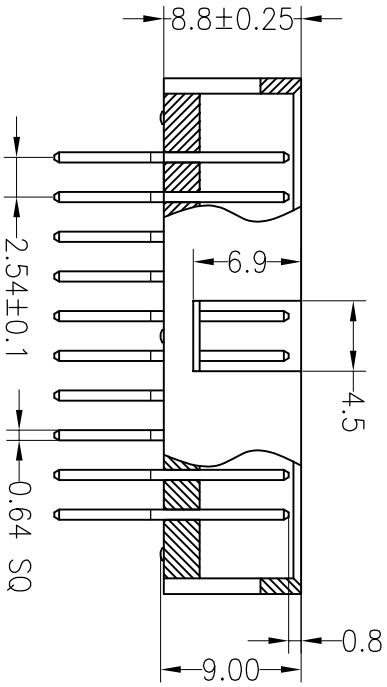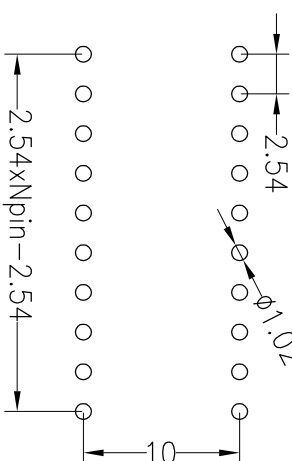

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	BEN	12.09.17	UNIT	mm	A4	1/1	3210-XXWXXXBK0001	
X.XX	±0.20	CHECK		SIZE		SHEET	1/1	2.54mm Box Header H8.8mm 蜈蚣脚	
X.XXX	±0.10	APPROVE		PROJ.		TITLE:			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL				
1	2012.09.17	NEW DRAWING							

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892