



SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(ULE94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

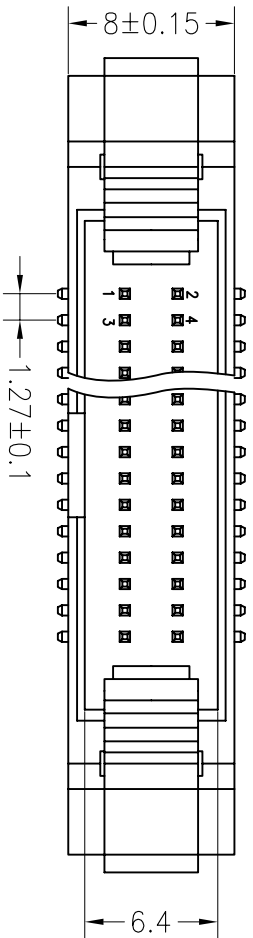



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

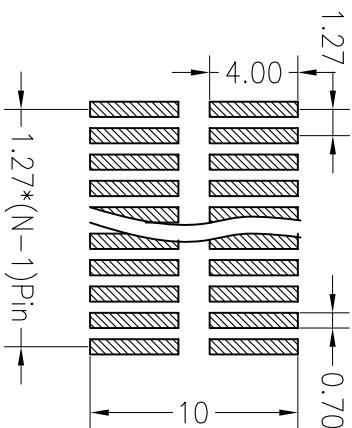

Ordering Information

3340 XX M XX X X L 01

- No. of Pins 10-100
- Contact Plating
 G0:0.8U" Gold
 G1:1U" Gold
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 G6:10U" Gold
 G7:15U" Gold
 Sn:Gold Flash/Tin
- Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP
- Color Type
 B=Black
 G=Grey

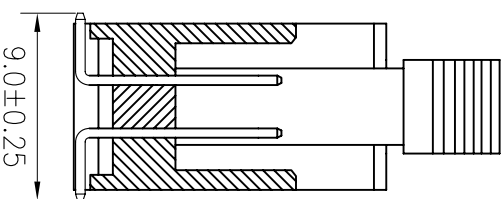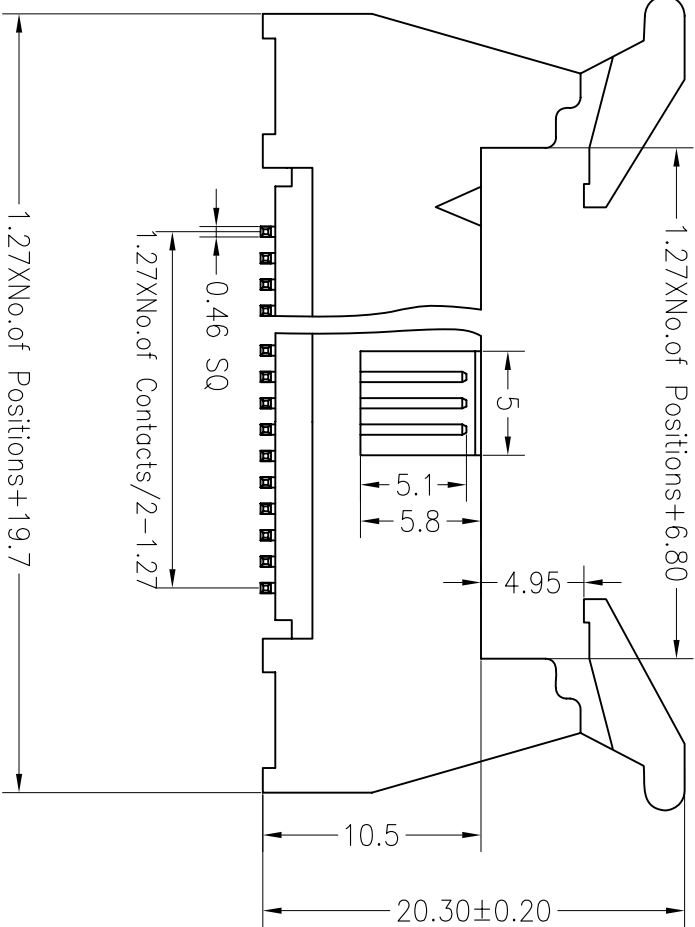

A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	LJUANJUN	16.08.03	SCALE	FIT	PART NO.	TITLE:
	1	2014.05.05	NEW DRAWING									
A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	LJUANJUN	16.08.03	SCALE	FIT	PART NO.	TITLE:
	1	2014.05.05	NEW DRAWING		X.XX	±0.20			UNIT	mm	A4	3340-XXXXXXL01
A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	LJUANJUN	16.08.03	SCALE	FIT	PART NO.	TITLE:
	1	2014.05.05	NEW DRAWING		X.XXX	±0.10			SIZE	1/1	A4	3340-XXXXXXL01
A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	LJUANJUN	16.08.03	SCALE	FIT	PART NO.	TITLE:
	1	2014.05.05	NEW DRAWING		Angle	±3°			SHEET	1/1	A4	3340-XXXXXXL01
A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	LJUANJUN	16.08.03	SCALE	FIT	PART NO.	TITLE:
	1	2014.05.05	NEW DRAWING		DIM	TOL			PROJ.		A4	3340-XXXXXXL01

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992