

**HSF** RoHS

**SPECIFICATIONS**

Rated(额定参数): 300V,8A

Dielectric strength(抗电强度): AC1600V/1 Minute

Insulation Resistance(绝缘电阻):1000MΩ Min

Contact Resistance(接触电阻):20mΩ Max

Temp. range(操作温度): -40℃~+105℃

MAX Soldering(瞬时温度):+260℃,5s





**IEC Standard**

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	200V	250V	320V
Rate current(A)	9.5A		

Housing Material(塑件): LCP (UL94 V-0)

Contact(端子): Brass, Tin plating(黄铜镀锡)

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO 6	OVER 6 TO 10	OVER 10 TO 24	TO 30	OVER 30 TO 60	OVER 60 TO 100	OVER 100 TO 150	OVER 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

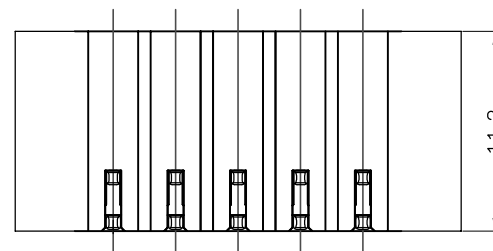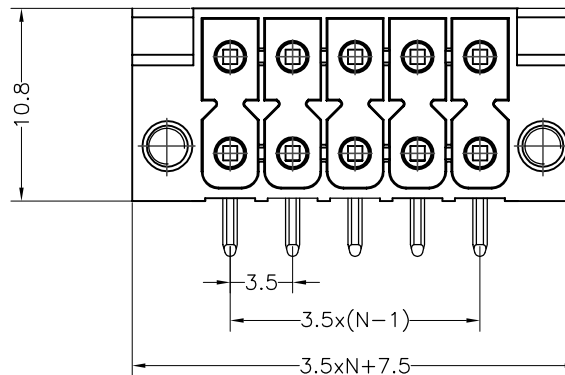

**Ordering Information**


**JL15EDGRHCM - 350 XX B 0 1**

Pitch  
350=3.5PH

No.of pins  
4P~48P

Housing Color  
B=Black  
G=Green  
U=Blue  
R=Red  
W=White  
Y=Yellow  
O=Orange  
E=Grey

Packing  
0=Pe bag  
T=Tube  
A=Tray

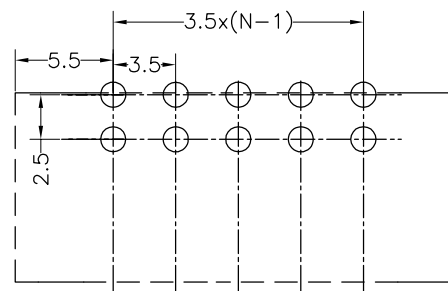

Recommended P.C.B Layout(Top Side)

DRAW	SHUANGPING ZHENG	SCALE	FIT	<b>JILN</b> ® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD	
		UNIT	mm		
CHECK	LICHAO LIU	SIZE	A4	PART NO.	JL15EDGRHCM-350XXB01
		SHEET	1/1	TITLE:	JL15EDGRHCM-THR-3.5-2XNP插拔式公座/带耳/黑色/PC3.0
APPROVE	YONGLIANG GAO	PROJ.			