

HSE ROHS

SPECIFICATIONS




Rated Current: 7.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: LCP
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)




Ordering Information

1125 11 XX F N XX M XXX X 01(2)

No. of Pins Per Row 1x1~1x20
 Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP
 Contact Plating
 G0:Gold Flash
 S0:Gold Flash/Tin
 SN:Tin
 SM:Matte-Tin
 Pin Length
 Packing
 0=PE Bag
 A=Tray
 T=Tube
 R=Reel+Cap

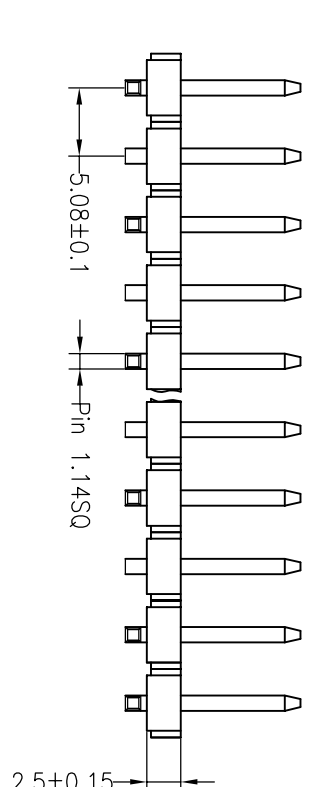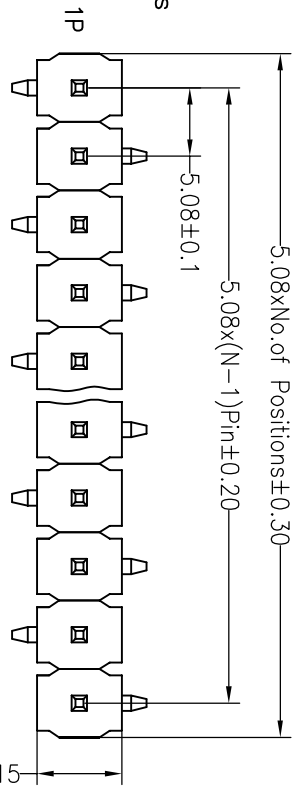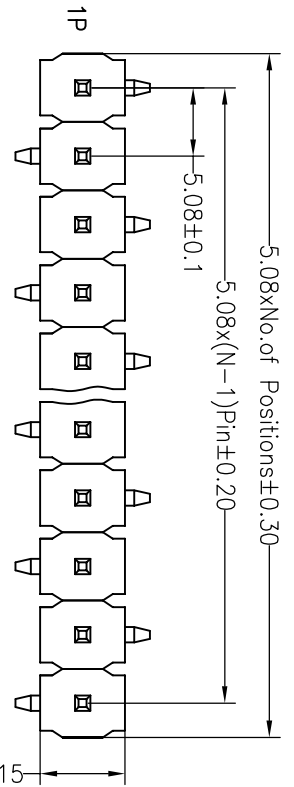

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

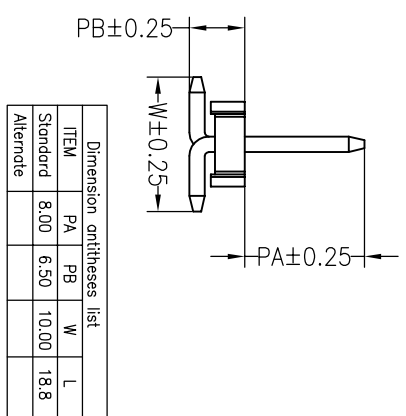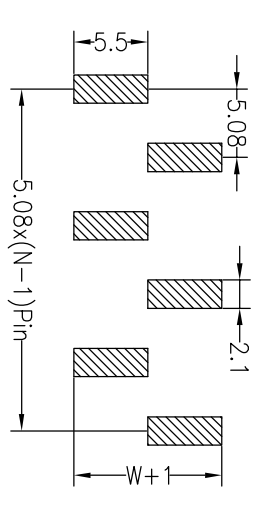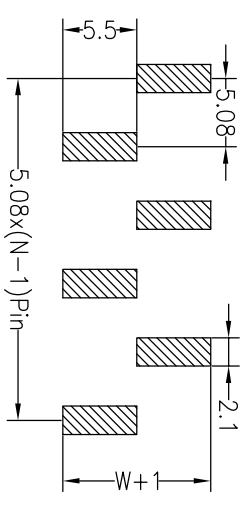

Dimension antitheses list					
ITEM	PA	PB	W	L	
Standard	8.00	6.50	10.00	18.8	
Alternate					

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	Ben	12.04.11	UNIT	mm			SIZE	A4
X.XX	±0.20	CHECK		SHEET	1/1	PROJ.		SHEET	1/1
X.XXX	±0.10	APPROVE		ANGLE	±3°	TOL		TITLE:	5.08PH 1xNpin H2.5mm SMT
A0	2012.04.11	NEW DRAWING							112511XXXXXX01(2)
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM					
1									

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892